

# SPECIFICATION SUBMITTAL SHEET



## SCHEDULE 40 FLEX ONE-PIECE WASTE & OVERFLOW CLASSIC, WITH TEST KIT

Job Name: \_\_\_\_\_  
 Job Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Approval: \_\_\_\_\_

Contractor: \_\_\_\_\_  
 Approval: \_\_\_\_\_  
 Contractor's PO#: \_\_\_\_\_  
 Representative: \_\_\_\_\_

### Specification:

- Schedule 40 Waste & Overflow
- Flexible one-piece pipe, factory assembled
- Direct drain shoe
- Available in PVC & ABS
- "Classic" High-flow Overflow Plate w/Test Kit
- All brass Push eN Lift stopper and strainer
- Test kit rated up to 4 stories
- Special lengths available upon request


UPC Listed

Manufactured to ASME Standard

ASME A 112.18.2-2015 / CSA B125.2-15

**TO ENSURE PROPER LENGTH IS ORDERED, PLEASE CONTACT CUSTOMER SERVICE AND PROVIDE TUB MANUFACTURER NAME & MODEL NUMBER .**

**800-888-8312 OR PLUMBING@IPSCORP.COM**

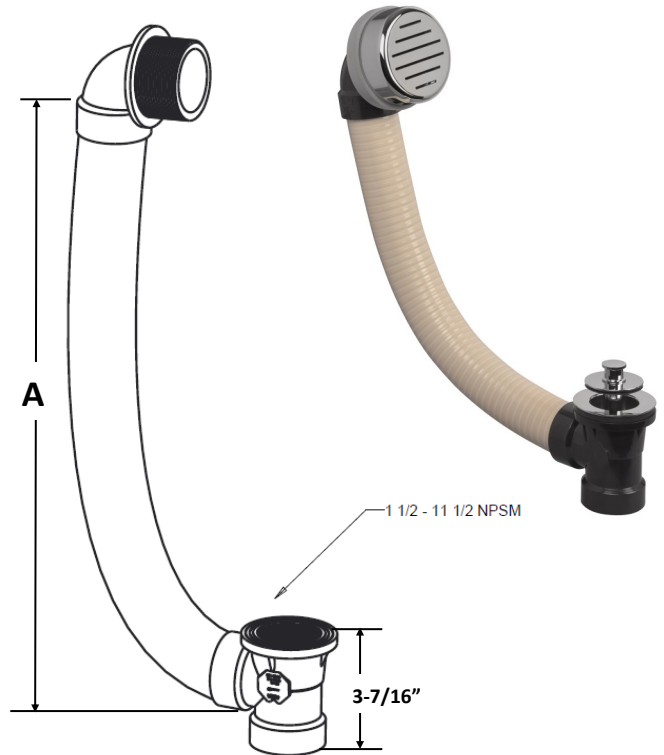

	IPS Part #	AB&A Model	Actual Pipe Length "A"	Stopper Style	Finish	Units/Case
ABS						
	65501	ABA2227FLEX16HF	16"	Push eN Lift	Chrome	12
	65506	ABA2227FLEX155HF	15.5"	Push eN Lift	Chrome	12
	65510	ABA2227FLEX15HF	15"	Push eN Lift	Chrome	12
	65508	ABA2227FLEX145HF	14.5"	Push eN Lift	Chrome	12
	65509	ABA2227FLEX14HF	14"	Push eN Lift	Chrome	12
PVC						
	65601	ABA2228FLEX16HF	16"	Push eN Lift	Chrome	12
	65606	ABA2228FLEX155HF	15.5"	Push eN Lift	Chrome	12
	65607	ABA2228FLEX15HF	15"	Push eN Lift	Chrome	12
	65608	ABA2228FLEX145HF	14.5"	Push eN Lift	Chrome	12
	65609	ABA2228FLEX14HF	14"	Push eN Lift	Chrome	12

