




WiFi Module



For video step-by-step instructions scan the QR code.

WiFi Module Set up

1. Loosen screws on the WiFi module cover.
2. Remove the WiFi module cover.
3. Note location of the red TEST and CLEAR buttons. **See Image 01.**
4. Insert three (3) AAA batteries. **See Image 02.**
5. Press and hold the red TEST and red CLEAR buttons until the solid blue light comes on and remains lit. **See Image 03.**
6. The WiFi module is now ready for pairing.
7. If you do not get a steady blue light, remove and check the batteries then repeat steps 4 and 5 again.



Image 01



Image 02



Image 03

Pairing the WiFi Module

8. Open the WiFi settings on your mobile device.
9. From your list of networks, select SASensor-xxxxxxx. Note: The last eight digits are a unique ID specific to each WiFi module. **See Image 04.**
10. Once connected, the WiFi Manager will launch. Select Configure WiFi. **See Image 05.**
11. Select the WiFi network your Floodstop device(s) will be using.
12. Enter the network's WiFi Password.
13. Your credentials are saved and the screen will change. Testing begins, which could take up to 2 minutes. **See Image 06.**
14. When the screen changes again to the WiFi setup, your WiFi module is then connected to the WiFi network. You are now ready to create and set up your account notifications. Note: If your screen changes back to the WiFi network login page, you will need to repeat steps.

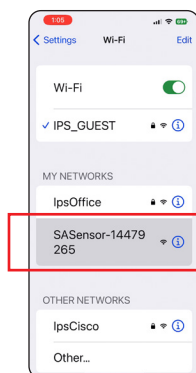


Image 04

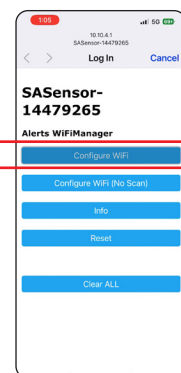


Image 05

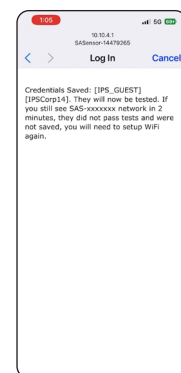


Image 06

Account Set-up

15. Using your device, open a browser and go to myspool.com.
16. Under user login at the bottom of the page, click "Create new account". **See Image 07.**
17. On the next page, create a username and add your e-mail address.
18. Enter the registration code "FLOODSTOP". This is also printed on the guide included with the WiFi module. **See Image 08.**
19. Read the Terms of Use and select "I agree with these terms".
20. Click the "Create new account" button. **See Image 09.**

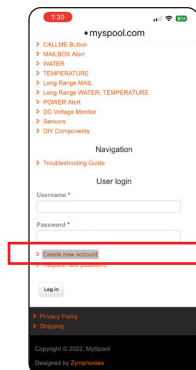


Image 07

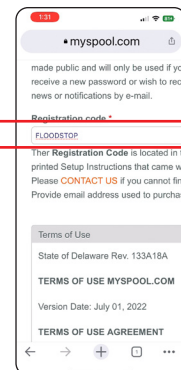


Image 08

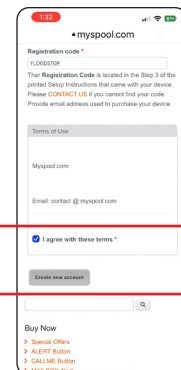


Image 09

Verify Account Set-up

21. Once your account has been created, you will receive an e-mail from MySpool.com.
22. Open the e-mail and click the link to login to your myspool.com account and set your password.

WiFi Module

Configure Your WiFi Module for Notifications

23. From your account at myspool.com, select "MY DEVICES" from the menu. **See Image 10.**
24. Click Configure Device. **See Image 11.**
25. Enter an e-mail address and phone number where you would like to receive notifications.
26. If applicable, select the time zone and active times when you would like to receive SMS notifications.
27. Give the WiFi Module a description and alert message.
28. Click "SAVE". **See Image 12.**

Floodstop Notifications

29. When a leak is detected, the WiFi module will send a notification to the device that is set up in the myspool.com account. **See Images 13 and 14.**
30. Notifications will show the date, time, and battery life (if applicable) for when the leak was detected. **See Image 15.**

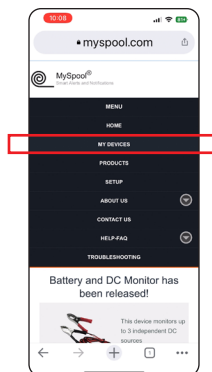


Image 10

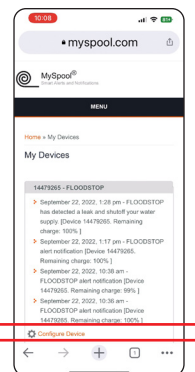


Image 11

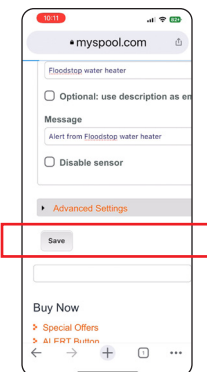


Image 12



Image 13

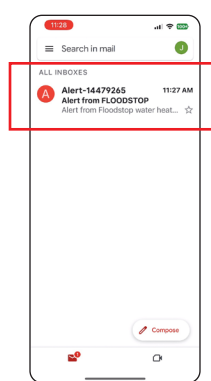


Image 14

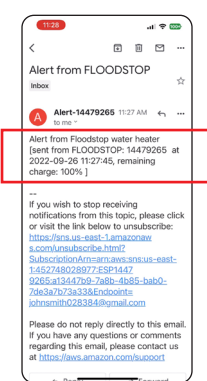


Image 15