




Pneumatic Cleanout Plugs

Specifications:

The Pneumatic Cleanout Test Plug is designed for the testing of plumbing pipelines above the cleanout tee. Each size is designed for one specific pipe size. The design of this plug will allow for passing of the test water by deflating the plug. After deflation the plug can be unscrewed from the test tee. Manufactured from a durable natural rubber compound these plugs are flexible yet rugged. Each size comes with an inflation valve molded into the threaded cap.

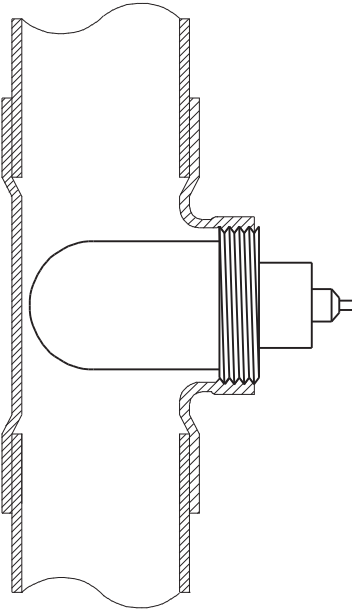

Boxed		Pipe Use Range				Maximum Back Pressure			
Nominal Size (inches)	Product Code	Minimum Pipe Diameter (inches)	Maximum Pipe Diameter (inches)	Cleanout Size (inches)	Inflation Pressure (psig)	Water Head (feet)	Air (psig)	Units/Case	Shipping Weight (pounds)
1-1/2	83651	1.38	1.63	1-1/2	35	30	13	6	2.20
2	83652	1.75	2.25	2	35	30	13	6	2.60
3	83653	2.75	3.25	3	35	30	13	6	5.40
4	83654	3.75	4.25	4	35	30	13	6	9.80
Bulk		Pipe Use Range				Maximum Back Pressure			
Nominal Size (inches)	Product Code	Minimum Pipe Diameter (inches)	Maximum Pipe Diameter (inches)	Cleanout Size (inches)	Inflation Pressure (psig)	Water Head (feet)	Air (psig)	Units/Case	Shipping Weight (pounds)
1 1/2	83661	1.38	1.63	1 1/2	35	30	13	12	3.40
2	83662	1.75	2.25	2	35	30	13	12	4.70
3	83663	2.75	3.25	3	35	30	13	12	9.80
4	83664	3.75	4.25	4	35	30	13	12	17.00

