




Multi-Size Pneumatic Front Air Test Plugs

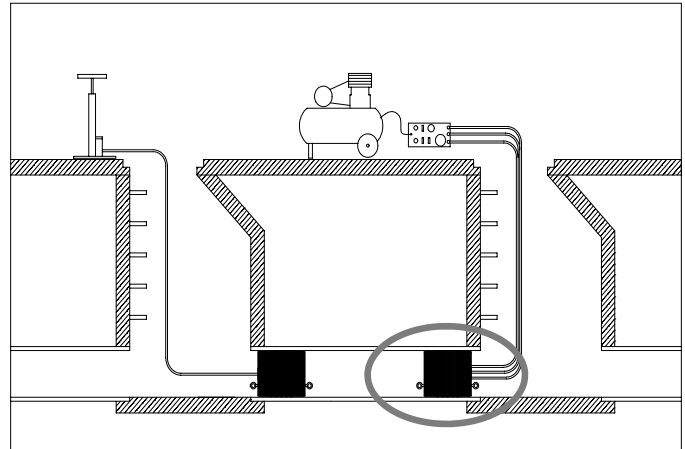

Specifications:

The Pneumatic Front Air Test Plug is designed for the testing of pipelines or to temporarily stop the flow. It can be used individually as a test plug or together with another plug for testing. Each plug is designed for two or more pipe sizes. These plugs are suitable for many different pipe materials. Manufactured from a durable natural rubber compound these plugs are flexible yet rugged. Each size comes with an eyebolt at each end for connecting directly to another Air Test Plug or to fasten a rope or inflation/lift line.

Nominal Size	Product Code	Plug Use Range		Plug Diameter (inches)	Plug Length (inches)	Overall Plug Length (inches)	Bypass Size (inches)	Inflation Pressure	Maximum Back Pressure		Shipping Weight
		Minimum Pipe Diameter (inches)	Maximum Pipe Diameter (inches)						Water Head (feet)	Air (psig)	
4-8"	84048	3.75	8.25	3.50	12.00	15.00	None	30	40	17	4.3
8-12"	84082	7.09	12.25	6.75	15.75	17.00	None	30	40	17	9.2
12-18"	84118	10.76	18.25	10.25	23.00	27.00	None	30	40	17	22.0
12-24"	84124	11.95	24.25	11.50	29.00	34.00	None	21	12	5	33.0
15-30"	84146	14.00	30.25	13.70	55.00	55.00	None	20	18.0	8	51.0
20-36"	84147	19.00	36.25	18.50	64.00	64.00	None	20	18.0	8	85.0
24-48"	84148	22.00	48.25	21.50	84.00	84.00	None	15	18.0	8	112.0
36-60"	84149	34.50	60.25	29.50	84.00	84.00	None	10	13.8	6	150.0
48-72"	84151	46.00	72.25	43.50	84.00	84.00	None	10	13.8	6	350.0
60-96"	84152	58.00	96.25	56.00	110.00	110.00	None	10	13.8	6	575.0



500 Distribution Parkway, Collierville, TN 38017 ▪ Phone: 800-888-8312 ▪ Fax: 901-853-5008 ▪ www.ipscorp.com