



STOP FLOOD DAMAGE BEFORE IT EVER STARTS™

Condensate Pump

With Safety Switch

Features

- Ideal for furnace or air conditioner
- Automatic, maintenance free operation for removing condensation buildup from furnaces, ice makers, and dehumidifiers
- Corrosion-resistant construction designed to resist high-humidity environments
- Safety switch provides automatic shutoff of connected appliances, such as air conditioners, dehumidifiers, and furnaces
- 20' tubing included for quick, easy installation



PRODUCT	DESCRIPTION	MODEL	UNITS/CASE
22600	CONDENSATE PUMP, 1/20HP	FSCP120	4

APPLICATION

Ideal for furnace or air conditioner, etc.

MOTOR SPECIFICATIONS

Voltage	115
Amps	1.7
Hertz	60
Phase	Single
RPM	3450 RPM
Motor Type	Shade pole
Insulation	Class B
Circuit Requirements	10 AMP
Motor Shaft	Stainless steel
Upper Motor Bearing	Ball bearing
Lower Motor Bearing	Ball bearing
Cooling	Fan cooled
Motor Protection	Auto reset thermal overload protector


PUMP SPECIFICATIONS

Discharge Size	20"x3/8" I.D vinyl discharge tubing
Pump Housing	Thermoplastic
Diffuser	Thermoplastic
Impeller Material	Reinforced Thermoplastic
Liquid Temp. Range	32°-95°F
Fasteners	Steel
Solids Handling	0" spherical
Tank Capacity	1/2 gallon collection
Cord Length	6'
Cord Type	SJTW 18AWG/3C, UL list

AUTOMATIC SWITCH SPECIFICATIONS

Type	Built-in micro switch and shutoff switch
Material	Reinforced thermoplastic

PERFORMANCE

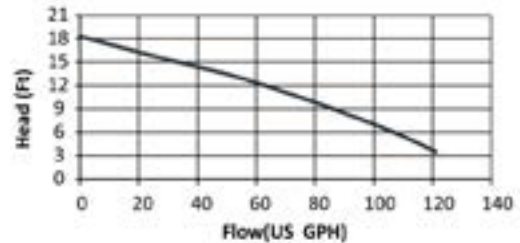

MODEL	HP	DISCHARGE HEIGHT (ft)	0	5	10	15
FSCP120	1/20	GPM	2.2	1.8	1.2	0.4
		GPH	132	108	72	24

DIMENSIONS

