

FLOODSTOP®

IPS CORPORATION

STOP FLOOD DAMAGE BEFORE IT EVER STARTS™

Descaler Kit

1/6 HP

Features

- Makes it easy to flush a tankless heater
- Includes 5 Gal. bucket, pump, two 6-1/2' hoses, and 7 oz descaler powder
- Easy convenient kit
- Pumps up to 27 GPM through the system
- Bucket is made from durable plastic



PRODUCT	DESCRIPTION	MODEL
22900	DESCALER POWDER, 7 OZ	FSADES07
22901	DESCALER KIT	FSDSKIT

APPLICATION

Automatic utility pump for general water transfer


Voltage	115
Amps	2.2
Hertz	60
Phase	Single
RPM	3450 RPM
Motor Type	Permanent Split Capacitor (PSC)
Insulation	Class B
Circuit Requirements	15 AMP
Duty Rating	Continuous*
Shaft Seal	Lip seal
Motor Shaft	Stainless steel
Upper Motor Bearing	Ball bearing
Lower Motor Bearing	Ball bearing
Cooling	Oil cooled
Motor Protection	Auto reset thermal overload protector

*For continuous, the water depth must be at least 6" to prevent the motor from overheating

PUMP SPECIFICATIONS

Discharge Size	1" MNPT with 3/4" MNPT adapter
Cord Length	10'
Cord Type	SJTW 18AWG/3C, UL list
Pump Housing	Reinforced thermoplastic
Pump Base	Reinforced thermoplastic
Impeller Material	Reinforced thermoplastic
Gasket	Rubber
Solids Handling	1/8" spherical
Liquid Temp. Range	32°-95°F
Operation	Manual
Fasteners	Stainless steel

PERFORMANCE

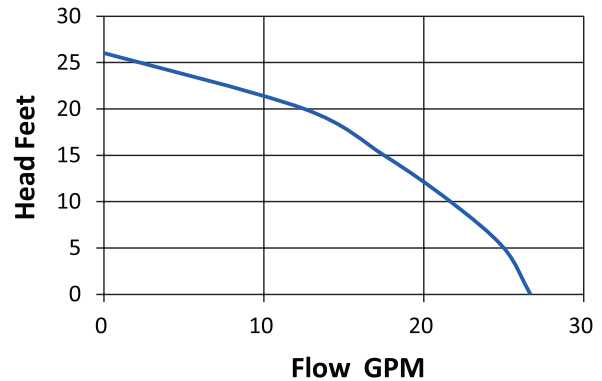

MODEL	HP	DISCHARGE HEIGHT (ft)	0	5	10	15	20	25
FSDSKIT	1/6	GPM	25	23	22	18	13	5
		GPH	1500	1380	1320	1080	780	300



Descaler Powder

- Removes scale, lime, mineral deposits and rust from tankless water heaters
- Solution is non-toxic, biodegradable, non-flammable and completely safe for equipment