

FLOODSTOP®

IPS CORPORATION

STOP FLOOD DAMAGE BEFORE IT EVER STARTS™

Utility Pump

1/4 HP

Features

- Automatically turns ON when water reaches 1-1/4", and OFF at 1/4" water level
- Energy-efficient PSC motor with thermal overload protection
- Water-cooled, oil free motor design is safe to use around fish and plants
- Corrosion-resistant thermoplastic construction
- Use to drain water from window wells, flooded basements, water gardens, stock tanks, flat roofs, pool covers and more
- Flexible rubber impeller helps prevent clogging and handles up to 1/8" spherical solids
- 1" NPT discharge with garden hose adapter included



PRODUCT	DESCRIPTION	MODEL
22801	UTILITY PUMP, 1/4 HP	FSUP25TA

APPLICATION

Automatic utility pump for general water transfer


Voltage	115
Amps	2
Hertz	60
Phase	Single
RPM	3450 RPM
Motor Type	Permanent Split Capacitor (PSC)
Insulation	Class B
Circuit Requirments	15 AMP
Duty Rating	Continuous*
Shaft Seal	Lip seal
Motor Shaft	Stainless steel
Upper Motor Bearing	Ball bearing
Lower Motor Bearing	Ball bearing
Cooling	Water cooled
Motor Protection	Auto reset thermal overload protector

*For continuous, the water depth must be at least 6" to prevent the motor from overheating

PUMP SPECIFICATIONS

Discharge Size	1" MNPT & garden hose adapter included
Cord Length	10'
Cord Type	SJTW 18AWG/3C, UL list
Pump Housing	Reinforced thermoplastic
Pump Base	Reinforced thermoplastic
Impeller Material	Reinforced thermoplastic
Gasket	Rubber
Solids Handling	1/8" spherical
Liquid Temp. Range	32°-95°F
Operation	Automatic
Fasteners	Stainless steel

PERFORMANCE

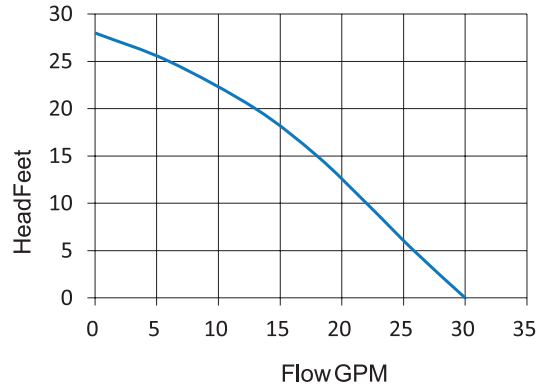

MODEL	HP	DISCHARGE HEIGHT (ft)	0	5	10	15	20	25	28
FSUP25TA	1/4	GPM	30	26	22	18	13	6	0
		GPH	1800	1560	1320	1080	780	360	0

DIMENSIONS

